

JAR系列

1000~5000减压阀



JELPC®

佳尔灵—中国好气动



JAR2000



JAR4000

气源件

AC,BC

AFC,BFC

AF,BF

AR,BR

AFR,BFR

AL,BL

JAC

JAF

JAR

JAW

JAL

FE

GC

ZYR10

JAD


MPX

EPX

订购码

| JA | R | 4000 | 04 |
|------------|------|------|--------------|
| 规格代码 | 功能代号 | 规格代号 | 接管口径 |
| JAR2000-02 | 减压阀 | 1000 | M5: M5 x 0.8 |
| JAR3000-03 | | 2000 | 01: G1/8" |
| | | 2500 | 02: G1/4" |
| | | 3000 | 03: G3/8" |
| | | 4000 | 04: G1/2" |
| | | 5000 | 06: G3/4" |
| | | | 10: G1" |

图形符号



规格参数


| 型号 | JAR1000-M5 | JAR2000-01 | JAR2000-02 | JAR2500-02 | JAR2500-03 | JAR3000-02 | JAR3000-03 | JAR4000-03 | JAR4000-04 | JAR4000-06 | JAR5000-06 | JAR5000-10 |
|--------|--------------|------------|---------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|
| 额定流量 | 110 | 550 | 550 | 2000 | 2000 | 2500 | 2500 | 6000 | 6000 | 6000 | 8000 | 8000 |
| 接管口径 | M5 | 1/8 | 1/4 | 1/4 | 3/8 | 1/4 | 3/8 | 3/8 | 1/2 | 3/4 | 3/4 | 1 |
| 最高使用压力 | 1.0 MPa | | | | | | | | | | | |
| 保证耐压力 | 1.5 MPa | | | | | | | | | | | |
| 使用温度范围 | 5~60°C | | | | | | | | | | | |
| 调压范围 | 0.05~0.7 MPa | | 0.05~0.85 MPa | | | | | | | | | |
| 阀型 | 带溢流型 | | | | | | | | | | | |

JAF系列

1000~5000系列过滤器

外形尺寸

JAF

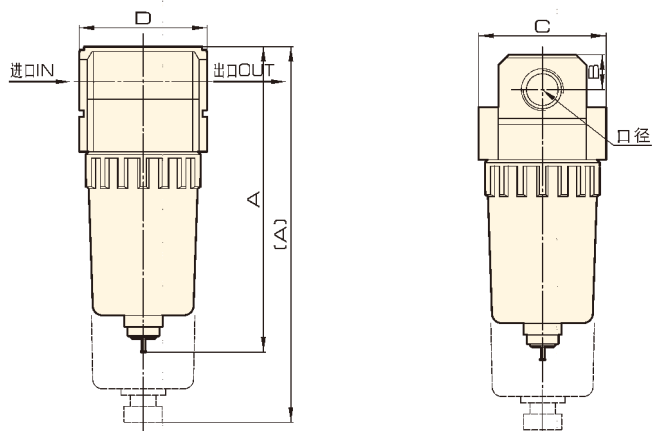


尺寸表

| 型号 | 口径 | A | B | C | D |
|------------|-----------|----------|----|----|----|
| JAF1000 | M5 | 66 | 7 | 25 | - |
| JAF2000 | 1/8 - 1/4 | 96 (118) | 11 | 40 | 40 |
| JAF3000 | 1/4 - 3/8 | 132.5 | 14 | 53 | 53 |
| JAF4000 | 3/8 - 1/2 | 168.5 | 18 | 70 | 70 |
| JAF4000-06 | 3/4 | 172.5 | 20 | 70 | 70 |
| JAF5000 | 3/4 - 1 | 247.5 | 24 | 90 | 90 |

JAR系列

1000~5000减压阀

JAR

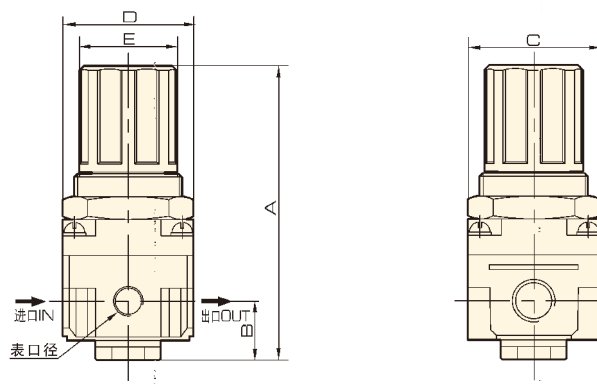

尺寸表

| 型号 | 口径 | A | B | C | D | E |
|------------|-----------|-------|------|----|----|----|
| JAR1000 | M5 | 61.5 | 11 | 25 | 25 | 28 |
| JAR2000 | 1/8 - 1/4 | 95 | 17 | 40 | 40 | 34 |
| JAR2500 | 1/4 - 3/8 | 102.5 | 25 | 48 | 53 | 34 |
| JAR3000 | 1/4 - 3/8 | 127.5 | 35 | 53 | 53 | 40 |
| JAR4000 | 3/8 - 1/2 | 149.5 | 37.5 | 70 | 70 | 54 |
| JAR4000-06 | 3/4 | 154 | 40.5 | 70 | 75 | 54 |
| JAR5000 | 3/4 - 1 | 168 | 48 | 90 | 90 | 54 |

气源件

AC,BC

AF,C,BFC

AF,BF

AR,BR

AFR,BFR

AL,BL

JAC

JAF

JAR

JAW

JAL

FE

GC

ZYR10

JAD

MPX

EPX